


## Parquet Data Sheet

### HARO PARQUET 3000/4000/6000 Strip Allegro, Plank 1-Strip Prestige

#### Construction

HARO PARQUET 3000/4000/6000 Strip Allegro, Plank 1-Strip Prestige are high-quality multilayer parquet products by Hamberger Flooring GmbH & Co. KG with the following construction:

1. Surface finish: *permaDur* natural matt finish, natural matt surface finish  
*naturaDur* or *naturaLin* natural oil surface
2. Top layer:  $\geq 2.5\text{mm} / \frac{3}{32}\text{"}$  (3000)  
 $3.5\text{mm} / \frac{1}{8}\text{"}$  (4000)  
 $5.4\text{mm} / \frac{7}{32}\text{"}$  (6000) thick precious wood wear layer
3. Middle layer/coreboard: Solid spruce fingerstrips or HDF-E1 board, carved

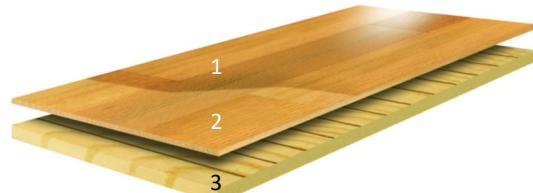

#### Dimensions and moisture behavior

All data refer to the delivery humidity of 5 - 9% according to EN 13183-1.

Length	Width	Total thickness	Top layer thickness	Equilibrium moisture content 23°C / 50% RH
EN 13647	EN 13647	EN 13647	EN 13647	EN 13183-1
490 mm ( $19\frac{11}{16}$ ", Allegro) 1000 mm ( $39\frac{3}{8}$ ", Prestige)	70 mm ( $2\frac{3}{4}$ ", Allegro) 120 mm ( $42\frac{3}{32}$ ", Prestige)	approx. 9 mm ( $\frac{23}{64}$ ") (3000) approx. 10 mm ( $\frac{25}{64}$ ") (4000) approx. 12 mm ( $\frac{15}{32}$ ") (6000)	$\geq 2.5\text{mm} / \frac{3}{32}\text{"}$ (3000) 3.5 mm ( $\frac{9}{64}$ ") (4000) 5.4 mm ( $\frac{7}{32}$ ") (6000)	6,0% (3000) 8,0% (4000) 8,0% (6000)
maximum deviation: $\pm 0.1\text{mm}$ (DIN EN 13489: $\pm 0.1\%$ )	maximum deviation: $\pm 0.1\text{mm}$ (DIN EN 13489: $\pm 0.2\text{mm}$ )	(DIN EN 13489: no information)	maximum deviation: $\pm 0.2\text{mm}$ (DIN EN 13489: $> 2.5\text{mm}$ )	maximum deviation: $\pm 0.5\%$ (DIN EN 13489: no information)

#### Installation system



Glue-down installation with tongue and groove

#### Surface finish

HARO PARQUET 3000/4000/6000 Strip Allegro, Plank 1-Strip Prestige can be optionally provided with the following surface refinements (HARO PARQUET 3000 Prestige only *permaDur*):

	<b>permaDur</b> VERSIEGELUNG	<b>naturaLin plus</b> NATURÖL-OBERFLÄCHE	<b>naturaDur</b> MATTES OBERFLÄCHENFINISH
Character	Hard-wearing finish	Natural oil surface that allows the wood to breathe	The natural matt surface finish with the best possible protection
Ingredients	Performance-optimised acrylic resin	Ingredients based on renewable raw materials	High-quality acrylic resins combined with ingredients on a natural basis
How it works	High-grade, UV-cured acrylic resins coat the wood with a 40-50 $\mu\text{m}$ thick protective varnish, making the parquet surface resistant to abrasion, scratches and stains.	The floor care oil is based on natural ingredients. It penetrates deep into the pores of the wood and protects the parquet floor from dirt and from drying out. The wood can breathe and retains its natural look and feel.	naturaDur surface treatment combines the natural look of oiled parquet with the protection and easy care of a prefinished surface

## Performance specifications

Reaction to fire *) [DIN EN 13501-1]	Slip resistance *) [EN 13893]	Formaldehyde emissions [DIN EN 717-1]	VOC emissions [AgBB-Scheme/Blue Angel]
Cfl-s1 / Dfl-s1	R9 / R10	≤ 0.05 ppm	≤ 300 ppm
Dfl = normally flammable Cfl = flame-resistant	fulfils the requirements of occupational safety in accordance with BGR 181; please follow the installation instructions	Evidence of emissions for: - Blue Angel (RAL UZ 176) - DGNB ENV 1.2, quality level 4, criteria matrix 47a <a href="http://www.dgnb-navigator.de">www.dgnb-navigator.de</a> - LEED v.1 Option 2 & Leed v4 for projects outside U.S; EQ credit low-emitting materials - BREEAM Hea02 Indoor air Quality, exemplary level emission criteria for wood flooring (table 18)	

Bond strength [DIN EN 204]	Thermal resistance	Weight per unit area	Castor chair resistance [EN ISO 4918]
≥ D3	0,052 m <sup>2</sup> k/W (3000) 0,076 m <sup>2</sup> k/W (4000) 0,090 m <sup>2</sup> k/W (6000)	8,24 kg/m <sup>2</sup> (3000) 5,34 kg/m <sup>2</sup> (4000) 5,80 kg/m <sup>2</sup> (6000)	> 25000 cycles
D3 = Stress group for indoor areas of high quality	Thermal conductivity value; limit value max. for underfloor heating is 0.15 m <sup>2</sup> K/W.	Wood is a natural material and affected by growth-related density variations. Therefore the data may slightly differ.	no changes in bond strength or impairment of the connection system.

\*) See separate information about the fire prevention class and slip resistance

## Quality label



[www.blauer-engel.de/uz176](http://www.blauer-engel.de/uz176)

[www.ibu-epd.com](http://www.ibu-epd.com)

HARO Parquet 4000 Strip Allegro, Plank 1-Strip Prestige meet the requirements of eco-building and MINERGIE-ECO in terms of ecological and health requirements and has received the eco-2 rating.